Extract from the online catalog

PCV 5/ 4-G-7,62

Order No.: 1720592

The figure shows a 5-pos. version of the product

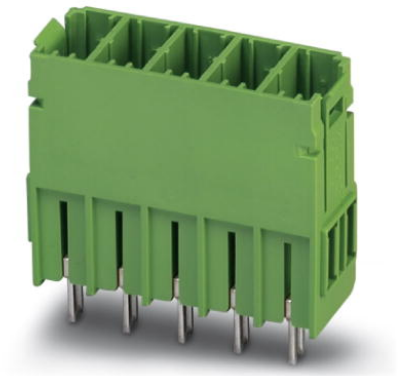

http://eshop.phoenixcontact.net/phoenix/treeViewClick.do?UID=1720592

Header, Nominal current: 41 A, Nom. voltage: 500 V, Pitch: 7.62 mm, Number of positions: 4, Color: green, Assembly: Soldering

Commercial data	
EAN	4046356113922
Pack	50 pcs.
Customs tariff	85366990
Weight/Piece	0.008642 KG
Catalog page information	Page 392 (CC-2009)

Product notes

WEEE/RoHS-compliant since: 12/05/2005

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Dimensions / positions

Pitch	7.62 mm
Dimension a	22.86 mm
Number of positions	4
Pin dimensions	0,8 x 1,0
Pin spacing	7.62 mm

Hole diameter	1.3 mm

Technical data

Insulating material group	I
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/2)	630 V
Rated voltage (II/2)	800 V
Nominal current I_N	41 A
Nominal voltage U_N	500 V
Maximum load current	41 A
Insulating material	PA
Inflammability class acc. to UL 94	V0

Certificates / Approvals

Certification	CUL, UL

CUL

Nominal voltage U_N	300 V
Nominal current I_N	10 A

UL

Nominal voltage U_N	300 V
Nominal current I_N	10 A

Diagrams/Drawings

Drilling plan/solder pad geometry

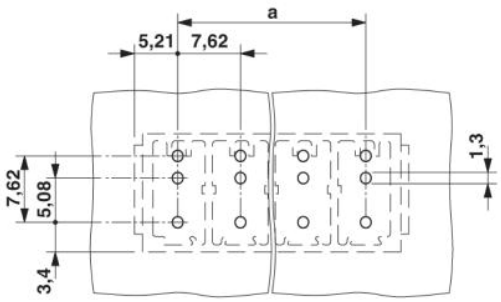

Dimensioned drawing

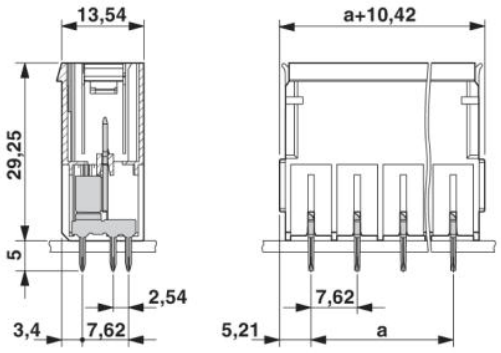

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
http://www.phoenixcontact.com

© 2010 Phoenix Contact
Technical modifications reserved;